


Flashing band

■ Aluminium self-adhesive flashing band, used for the waterproofing of chimney and wall abutments


- High flexibility
- 25% stretchability
- High gluing performance (butyle)
- 6 Colors : Onduline red, Brick red, Terracotta, Brown, Black, Grey
- 30 cm x 2,5 m



For chimneys

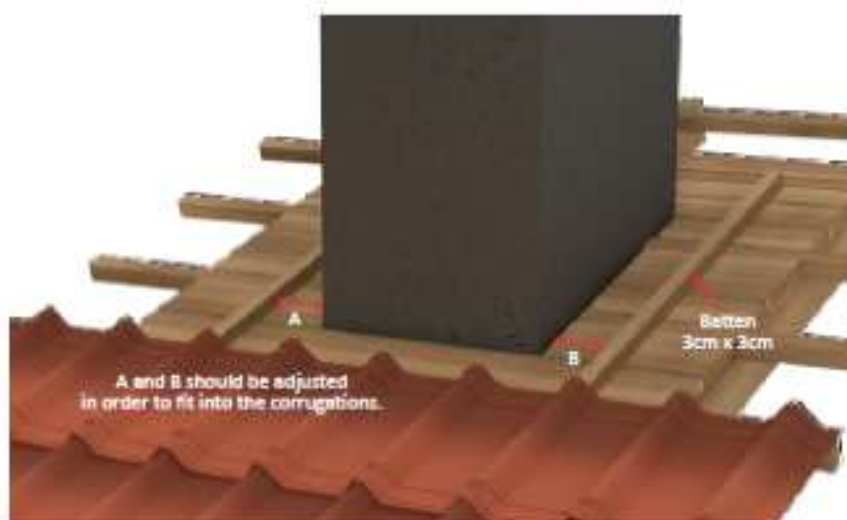

- 1 Full deck is necessary for the roof part around the chimney. Surround the chimney with a batten of 3cm x 3cm entering the corrugations of the tiles installed at the lower part of the roof.

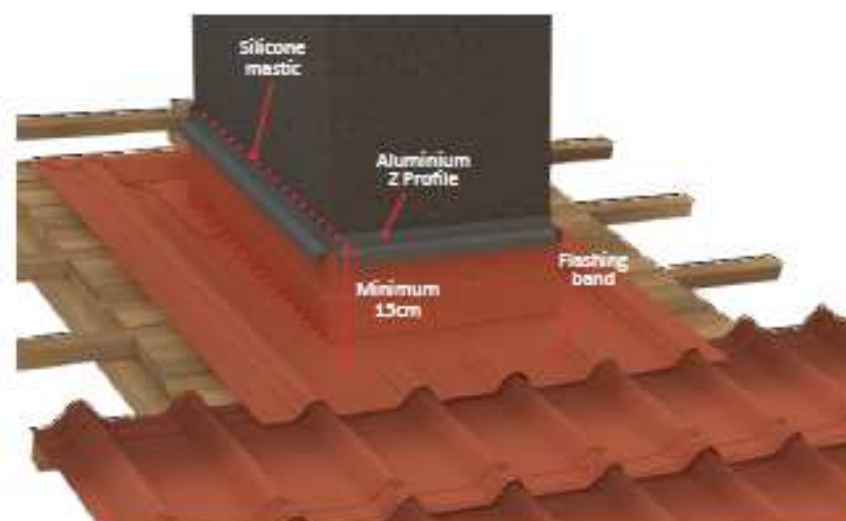


- 2 Apply a layer of FLASHING BAND® around the chimney, covering also the battens. Finish upper edge of FLASHING BAND® with the Z profile and silicone mastic.

For side wall abutments



- 1 Position the FLASHING BAND membrane, overlapping one corrugation in order to ensure waterproofing.

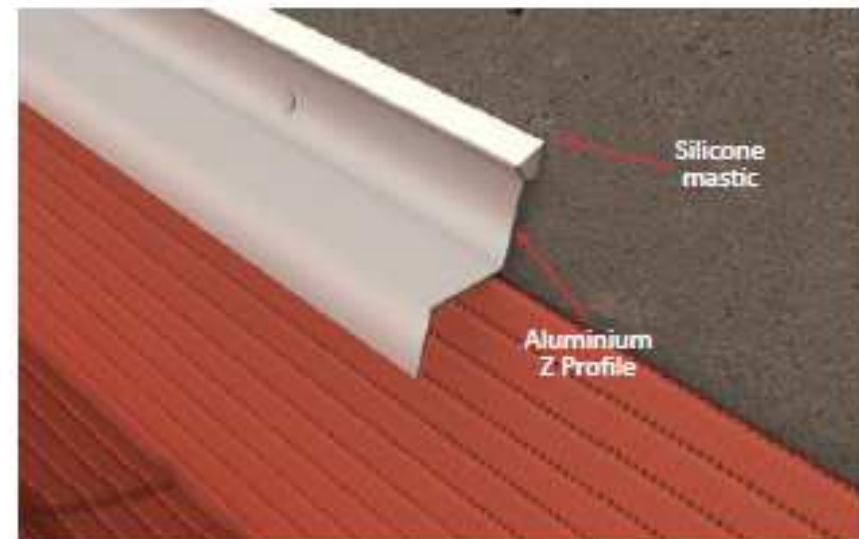

- 2 Secure the waterproofing along the wall by fixing an aluminium Z-profile and a strip of silicone mastic.

Flashing band

Onduline®

Packaging



Individual box



Grouping box 4 rolls
with color identification



Pallet 360 rolls
(90 grouping boxes)